

Drawer runners for wooden drawers

- ▶ KA 4932 over extension runner for side installation
- ▶ Load capacity 60 kg




- ▶ Over extension runner with pull-out stop and roll-out prevention
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 1
- ▶ Galvanised steel, blue passivated

KA 4932 ball bearing runner, 12.7 mm installed width

Nominal length / drawer length NL mm	Minimum carcase depth KT mm	Hole spacing b1 mm	Hole spacing b2 mm	Hole spacing b3 mm	Hole spacing b4 mm	Hole spacing b5 mm	Hole spacing C mm	Order no.	PU
250	254						192	0 041 356	1 pair
300	304	96					242	0 041 357	1 pair
350	354	96					292	0 041 358	1 pair
400	404	96	96				342	0 041 359	1 pair
450	454	96	128				392	0 041 361	1 pair
500	504	96	128	64			442	0 041 362	1 pair
550	554	96	128	64	32	32	492	0 041 363	1 pair
600	604	96	128	96	32	32	542	0 041 364	1 pair
650	654	96	128	160	32	32	592	0 041 365	1 pair
700	704	96	128	192	32	32	642	0 041 366	1 pair

Planning dimensions

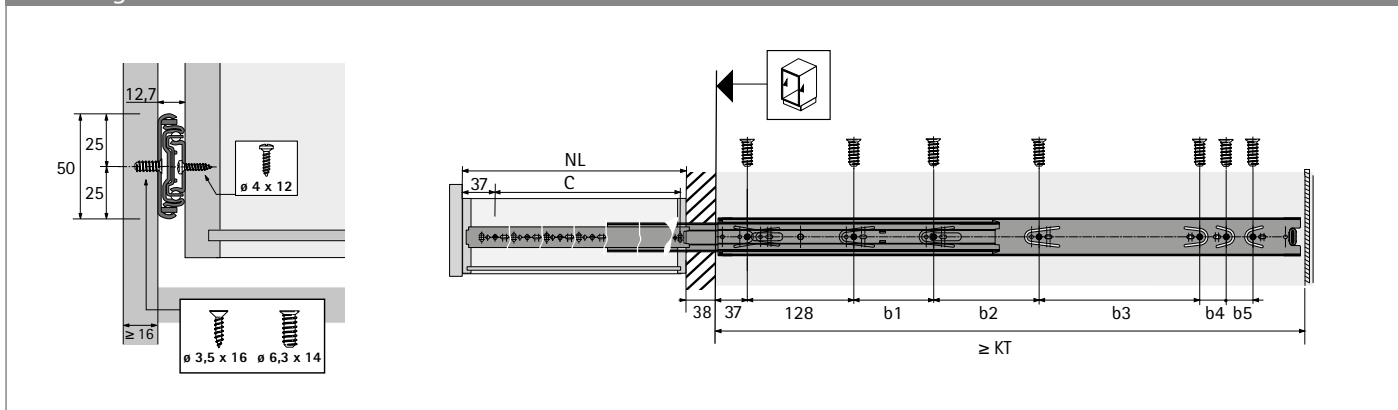

Advice

- ▶ For technical information, see page 1610 - 1612
- ▶ For accessories, see page 1636 - 1641