

# Drawer runners for wooden drawers

- ▶ KA 5332 full extension runner for side installation
- ▶ Load capacity 30 kg




- ▶ Precision full extension runner with pull-out stop and roll-out prevention
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 1
- ▶ Galvanised steel, blue passivated

## Ball bearing runner KA 5332, 12.7 mm installed width

Nominal length / drawer length NL mm	Minimum carcass depth KT mm	Hole spacing b1 mm	Hole spacing b2 mm	Hole spacing b3 mm	Hole spacing b4 mm	Hole spacing b5 mm	Hole spacing C mm	Order no.	PU
250	254						192	9 070 496	1/10 pairs
300	304	96					242	9 070 498	1/10 pairs
350	354	96					292	9 057 402	1/10 pairs
400	404	96	96				342	9 057 403	1/10 pairs
450	454	96	128				392	9 057 404	1/10 pairs
500	504	96	128	64			442	9 057 405	1/10 pairs
550	554	96	128	64	32	32	492	9 057 407	1/10 pairs

## Planning dimensions

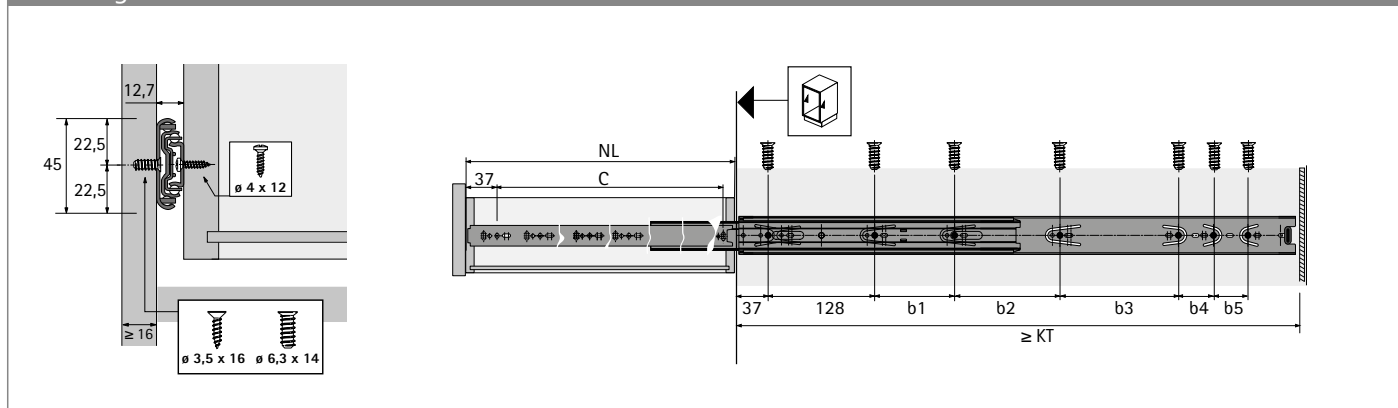

## Advice

- ▶ For technical information, see page 1610 - 1612
- ▶ For accessories, see page 1636 - 1641