

# Drawer runners for wooden drawers

- ▶ KA 4532 full extension runner with Push to open for side installation
- ▶ Load capacity 35 kg




- ▶ **Push to open** - the precision activating mechanism opens the drawer automatically and in virtual silence - a light press is all it takes!
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 2
- ▶ Galvanised steel, blue passivated

## Ball bearing runner KA 4532 Push to open, 12.7 mm installed width

| Nominal length / drawer length NL mm | Minimum carcass depth KT mm | Hole spacing b1 mm | Hole spacing b2 mm | Hole spacing b3 mm | Hole spacing C mm | Order no. | PU         |
|--------------------------------------|-----------------------------|--------------------|--------------------|--------------------|-------------------|-----------|------------|
| 300                                  | 304                         |                    |                    |                    | 192               | 9 114 281 | 1/10 pairs |
| 350                                  | 354                         | 64                 |                    |                    | 242               | 9 114 282 | 1/10 pairs |
| 400                                  | 404                         | 96                 |                    |                    | 292               | 9 114 283 | 1/10 pairs |
| 450                                  | 454                         | 160                |                    |                    | 342               | 9 114 284 | 1/10 pairs |
| 500                                  | 504                         | 96                 | 96                 |                    | 392               | 9 114 285 | 1/10 pairs |
| 550                                  | 554                         | 96                 | 128                |                    | 442               | 9 114 286 | 1/10 pairs |
| 600                                  | 604                         | 96                 | 128                | 96                 | 492               | 9 114 288 | 1/10 pairs |
| 650                                  | 654                         | 96                 | 128                | 128                | 542               | 9 114 289 | 1/10 pairs |
| 700                                  | 704                         | 96                 | 128                | 192                | 592               | 9 114 290 | 1/10 pairs |

## Planning dimensions

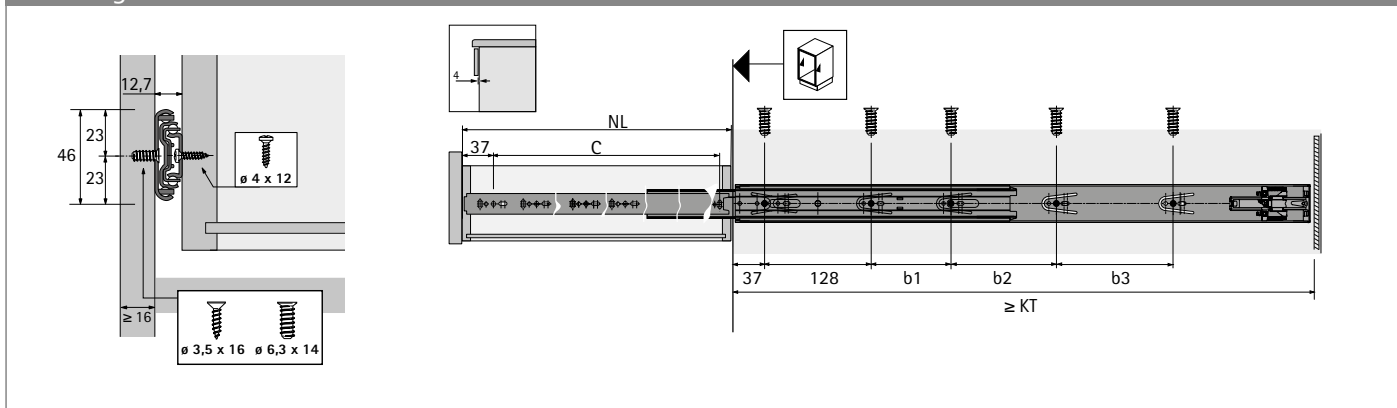

## Advice

- ▶ For technical information, see page 1610 - 1612
- ▶ For accessories, see page 1636 - 1641