

Drawer runners for wooden drawers

- ▶ KA 4620 over extension runner for side installation
- ▶ Load capacity 90 kg




- ▶ Over extension runner with pull-out stop and roll-out prevention
- ▶ A release lever makes the drawer easy to remove and reinstall
- ▶ Precision control for moving smoothly and freely and high lateral stability
- ▶ For drawers with grooved, rebated or loosely fitted drawer bottom panel
- ▶ Load capacity to EN 15338, Level 1
- ▶ Galvanised steel, blue passivated

KA 4620 ball bearing runner, 19 mm installed width

Nominal length / drawer length NL mm	Minimum carcass depth KT mm	Hole spacing b1 mm	Hole spacing b2 mm	Hole spacing C mm	Order no.	PU
300	304	125		233,5	0 041 389	1 pair
350	354	175		283,5	0 041 391	1 pair
400	404	111	114	333,5	0 041 392	1 pair
450	454	136	139	383,5	0 041 393	1 pair
500	504	161	164	433,5	0 041 394	1 pair
550	554	186	189	483,5	0 041 395	1 pair
600	604	211	214	533,5	0 041 396	1 pair
650	654	236	239	583,5	0 041 397	1 pair
700	704	261	264	633,5	0 041 398	1 pair

Planning dimensions

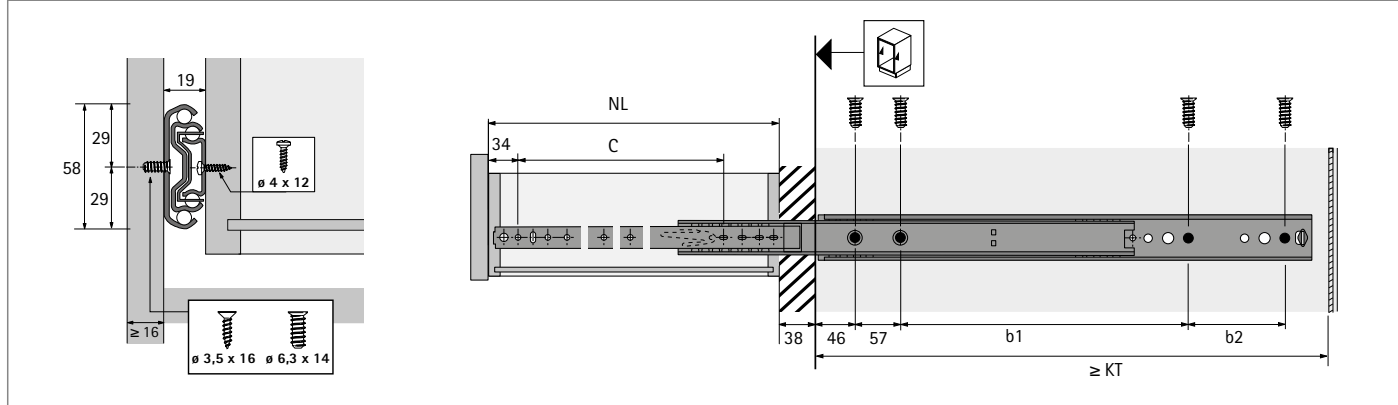

Advice

- ▶ For technical information, see page 1610 - 1612
- ▶ For accessories, see page 1636 - 1641